

PANTS MEASUREMENTS

Name _____

☐ MALE ☐ FEMALE Height _____ Weight _____ Age _____

1. Are you a bodybuilder? **NO** ☐ **YES** ☐

2. Are there any existing physical conditions that should be allowed for in the fit of these pants? If Yes, describe.

3. Are you measuring over any braces/armor? If Yes, describe.

RIDING POSITION DRAG RACE




☐ Upright ☐ Race Tuck ☐ Laydown

RIDING POSITION - STREET OR ROAD RACE

☐ Super Sport ☐ 250 GP ☐ Sidecar

☐ RACE TUCK ☐ EXTREME TUCK ☐ LAYDOWN

FLAT MEDIUM LARGE EXTRA LARGE



ATTENTION!

WARNING: If your measurement checks are off, your pants will not fit correctly. These checks will take much less time than waiting for adjustments to be made. Help us eliminate unnecessary fit issues by providing accurate measurements.

IMPORTANT: Please send us THREE clear full length photos with the measuring device around your waist. One full frontal, one side profile, one rear with arms at side.

NOTE: Measure your body, then if you are wearing gear (back brace, knee brace, etc. then measure while wearing your brace(s). Write in any open space with a note describing your gear and anything that will help us provide you with the best fit.

MUST BE WEARING A PAIR OF GOOD FITTING JEANS AND A T-SHIRT!

IF YOU HAVE QUESTIONS CALL 508-678-2000

MAKE SURE ELASTIC BELT (VMD) DOES NOT MOVE

MEASUREMENTS TAKEN BY:

GUIDE KEY

Check if completed

SECTION A. ____

SECTION B. ____

SECTION C. ____

SECTION E. ____

REMEMBER !



VMD - WAIST

This is an indicator showing where the elastic band from the Vanson Measuring Device rests (at the navel and parallel with the ground). Put this device on **AFTER** you complete measurement #3.



CHECKERED BOX

This is used when you are doing your second measurement over your armor or brace



100% MADE SOLD AND SERVICED IN THE U.S.A.

WITH CORRECT MEASUREMENTS AND EQUATIONS WE OFFER A 100% GUARANTEED FIT

SECTION A CIRCUMFERENCES

Put on **VMD**

WAIST*
At navel, **VMD** belt is parallel to the floor.

BELTLINE*
at top of pants

HIPS*
Around fullest part
Mark outseam

THIGH 7
2" below crotch
Mark outseam

KNEE CIRCUMFERENCE 8
With leg straight
Mark outseam

CALF 9
Around fullest part
OVER BOOT
YES ☐ NO ☐

ANKLE* 10
Around at anklebone
OVER BOOT
YES ☐ NO ☐

SECTION B VERTICAL/HORIZONTAL

14 WAIST TO HIPS **B** **I**

15 WAIST TO THIGH **B** **I**

16 WAIST TO MID KNEE **B** **K**

17 OUTSEAM **B** **L**

18 KNEE TO ANKLE-BONE **K** **L**

19

21 CROTCH TO MID-KNEE **C** **K** At inseam

22 INSEAM **C** **L** To inner anklebone (pull pants up snug before measuring).

23 **#23 = #22 - #21**
#23 should = #18

#17 - #16 = #18
#18 should = #19

LEGEND

- B. VMD-Waist** Waist at navel where you have the VMD - parallel to floor
- C. Crotch** Pants seam intersection
- D. VMD-Waist Back** Middle of back where waist and spine meet
- F. Beltline Front** Center of the beltline in front of pants
- G. Beltline Back** Center of the beltline in back of pants
- I. Hips** Widest part of hips. Mark on outseam with tape.
- J. Thigh** 2" Below crotch. Mark on outseam with tape.
- K. Knee** Middle of knee cap
- L. Ankle** At ankle bone

SECTION C

29 **D** **C**

25 **B** **C**

32 **B** **D**

SECTION E BELTLINE MEASUREMENTS

39 **G** **C**

37 **F** **C**

38 **G** **F**

Take Your Measurements

GENERAL INSTRUCTIONS:


- **Never measure yourself.** Get someone else to help you.
- For taking measurements, wear jeans that fit you comfortably but snugly and a t-shirt. Empty contents of pockets. Pull up pants for snug fit. Remove belt.
- On measurements involving the waist or **"VMD Waist"** use **Vanson Measuring Device** (see below). **Another tape will also be required** for measuring.
- Pull tape measure snug **DO NOT allow extra** in your measurements.

HOW TO USE THE VANSON MEASURING DEVICE

- This device is designed to assist you in obtaining consistent measurements. This is of utmost importance in order for us to make your suit fit as it should.
- Secure the **elastic belt** part of the device around waist at **navel**. Make sure **belt is parallel to ground**.
- The elastic should be a snug fit so it does not move up and down easily when you rotate the **tape** or slide the **tape slider buckle**.
- You can now snap the tape to the tape slider buckle.
- Have someone run the tape over your body to the point you need to **measure to**, then write down the measurement.
- Rotate tape for other measurements that are **from the same point**. For other **measure from** points, slide tape slider buckle.

Make sure elastic belt does not move accidentally during measuring process.

**If you have questions,
call Vanson's help line
(508) 678-2000**

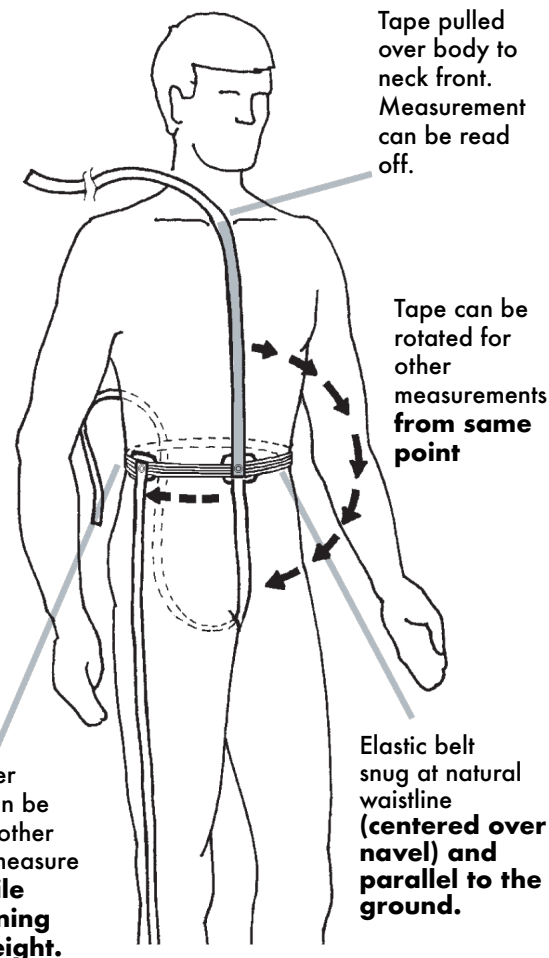


Make your own VMD


- 1 String/Elastic that will stay in place around waist at navel



- 1 Measuring tape



Make sure the band or string around the waist is parallel to the ground (periodically check throughout measurements). Make sure to take measurements along the string or band from the same points each time.

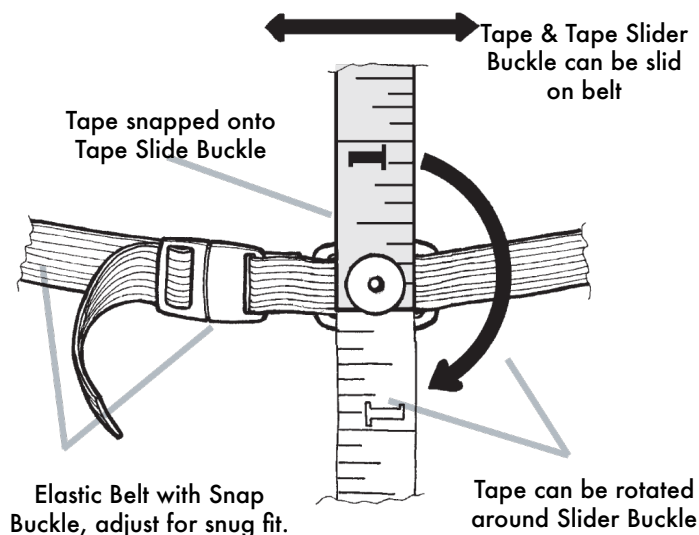

Vanson Measuring Device



Some suggestions on taking good measurements

1. Wear a pair of tight fitting jeans (with empty pockets) and a t-shirt.

(Please note on form if measurements are taken over different style clothing ie: shorts or sweat pants).

2. Stand up straight. Look straight ahead, do not look at the person measuring you.

3. Position the elastic VMD belt at the natural waistline (over the navel). After you have taken measurement #3 ! Be sure the elastic belt is parallel to the floor and that it does not move during the process.

Take the time to calculate your measurements and compare them. You are allowed 1" difference plus or minus on your nape of neck to wrist measurement (#28) and 1/2" margin of error on all others. Please remember that **you cannot measure yourself.**

THIS IS A TWO PERSON OPERATION!

A few helpful hints for the measurer:

When measuring the **rise (#32)**, you go from the navel through the legs and to the same point as navel on your back.

When measuring the inseam, follow the seam on their snug jeans. If their jeans are baggy (**which is not recommended**) have them hold the corners of their pockets and lift until the jeans are snug in the crotch area. To find the center of the knee, have them bend their leg and follow crease to center. **Do not allow the subject to move at all as all the measurements are critical and inter-related.**

The **hip (#6)** measurement is the fullest measurement around their rear.

IMPORTANT:

Please send us THREE clear full length photos while being measured with the measuring device around your waist. One full frontal arms at side, one side profile, one rear.